

HVP 8204


H.264 Pentaplex 720P Real Time Recording NVR




Key Features

- H.264 video compression
- 720P real-time recording
- HDMI & VGA output at up to 1920x1080P resolution.
- Dual-stream
- Multi channel synchronous playback
- HDD up to 4TB each.

Rear panel of HV8204



1. LAN Network Interface
2. RS-485 Interface
3. Power Supply
4. Power Switch
5. USB Interface
6. GND
7. HDMI Interface
8. VGA Output
- 9 Audio In
10. Audio Out
11. Network Interfaces with PoE function

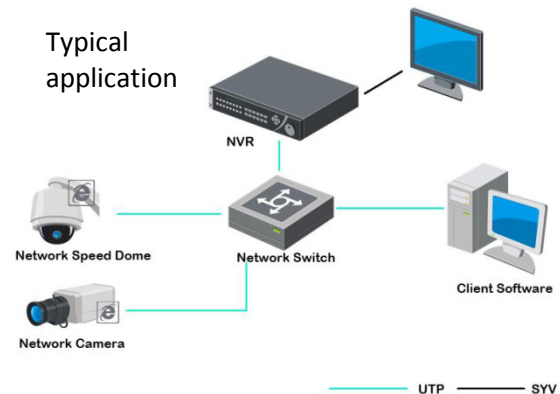

Model		HV8204P
Video/Audio input	IP video input	4-ch
	Two-way audio input	1-ch, RCA (2.0 Vp-p, 1kΩ)
Network	Incoming bandwidth	20Mbps
	Output bandwidth	40Mbps
	Remote connection	128
Video/Audio output	Recording resolution	5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
	HDMI/VGA OUTPUT	1-ch resolution: 1920x1080x60Hz, 1600X1200X60Hz, 1280x1024x60Hz, 1280x720x60Hz, 1024x768x60Hz
	CVBS (optional)	1-ch, BNC (1.0Vp-p, 75Ω) Resolution : 704 x 576 (PAL), 704 x 480 (NTSC)
	Audio Output	1-ch, RCA (Linear, 1KΩ)
	Playback resolution	5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
	Synchronous playback	4-ch, 720P/ 2-ch, 1080P/ 1-ch, 5MP
Hard disk	SATA	2 SATA interface for 2 HDDs
	Capacity	Up to 4TB each
External Interface	Network interface	1 RJ45 10 / 100 / 1000Mbps Ethernet interface
	Serial interface	1 RS-485 interface, half-duplex
	USB interface	2 × USB 2.0
	Alarm in/out (Optional)	4/1.
PoE	Interface	4 independent 10 / 100 Mbps PoE Ethernet interface
	Output consumption	52W
	Supported standard	AF
Others	Power supply	100~240VAC, 47~63Hz, 3A
	Consumption	≤ 15 W (without hard disk)
	Working temperature	0 °C ~ 55 °C
	Working humidity	10% ~ 90%
	Chassis	19-inch rack-mounted 1U chassis
	Dimensions (W × D × H)	315 × 242 × 45 mm
	Weight	≤ 2 Kg (without hard disk)

Note: H-PoE refers to High PoE standard, AT refers to 802.3at standard, and AF refers to 802.3af standard.