


HV 8216

H.264 Pentaplex 720P Real Time Recording NVR

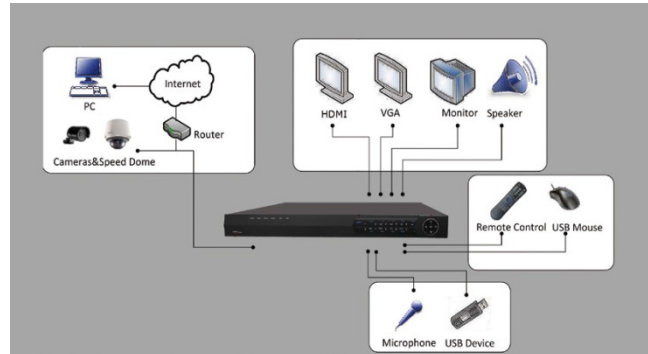

Key Features

- H.264 video compression
- 720P real-time recording
- HDMI & VGA output at up to 1920x1080P resolution.
- Dual-stream
- 16ch 4CIF, 8ch 720p, 4ch 1080p, 2ch 5MP synchronous playback
- HDD up to 4TB each.

		HV 8216
Video/Audio input	IP video input	16-ch
	Two-way audio input	1-ch, BNC (2.0 Vp-p, 1kΩ) (Voice talk input)
	Incoming bandwidth	50Mbps
Video/Audio output	Recording resolution	5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
	HDMI/VGA OUTPUT	1-ch resolution: 1920x1080x60Hz, 1600X1200X60hZ, 1280x1024x60Hz, 1280x720x60Hz, 1024x768x60Hz
	CVBS (optional)	1-ch, BNC (1.0Vp-p, 75Ω) Resolution : 704 x 576 (PAL), 704 x 480 (NTSC)
	Audio Output	1-ch, BNC (Linear, 1kΩ)
	Playback resolution	5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
	Synchronous playback	16ch 4CIF, 8ch 720p, 4ch 1080p, 2ch 5MP
Hard disk	SATA	2 SATA interface for 2 HDDs
	Capacity	Up to 4TB each
External Interface	Network interface	1 RJ45 10 / 100 / 1000Mbps Self-adaptive Ethernet interface
	Serial interface	1 x RS-485 interface (half-duplex interface)
	USB interface	2 × USB 2.0
	Alarm input	4 ch (Optional)
	Alarm output	1 ch (Optional)
General	Power supply	12V DC
	Consumption	≤ 10 W (without hard disk)
	Working temperature	-10 °C ~ 55 °C
	Working humidity	10% ~ 90%
	Chassis	19-inch rack-mounted 1U chassis
	Dimensions (W × D × H)	445 x 290 x 45mm
	Weight	≤ 4 Kg (without hard disk)