

HV8432


H.264 Pentaplex 32ch 720P Real Time Recording NVR



Key Features

- H.264 Video Compression
- 720P real-time recording
- HDMI & VGA output at up to 1920x1080P resolution
- Dual-stream
- Multi channel synchronous playback
- 4 SATA interfaces, up to 4TB each

Rear panel of HV8432

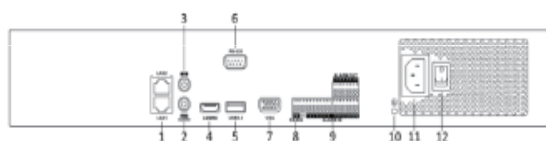

1. LAN1 and LAN2 Network Interfaces
2. AUDIO OUT
3. AUDIO IN
4. HDMI Interface
5. USB 3.0 Interface
6. RS-232 Serial Interface
7. VGA Interface
8. RS-485 Serial Interface
9. ALARM IN and ALARM OUT
10. GND
11. 100~240VAC Power Input
12. Power Switch



Model		HV8432
Video/Audio input	IP video input	32-ch
	Two-way audio input	1-ch, RCA (2.0 Vp-p, 1kΩ)
Video/Audio output	Recording resolution	5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
	HDMI/VGA OUTPUT	1-ch resolution: 1920x1080x60Hz, 1600X1200X60hZ, 1280x1024x60Hz, 1280x720x60Hz, 1024x768x60Hz
	Audio Output	1-ch, RCA (Linear, 1kΩ)
	Playback resolution	5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
	Synchronous playback	16 ch @ 4CIF, 12ch @720p, 6ch @ 1080p
Hard disk	SATA	4 SATA interface for 4HDDs
	Capacity	Up to 4TB each
External Interface	Network interface	2 RJ45 10 / 100 / 1000Mbps Ethernet interface
	Serial interface	1 RS-232 interface;1 RS-485 interface
	USB interface	2 x USB 2.0 + 1 x USB 3.0
	Alarm input (Optional)	16 ch (Optionally can be expanded to 16/8)
	Alarm output (Optional)	4 ch (Optionally can be expanded to 16/8)
General	Power supply	100~240VAC
	Consumption	≤ 20 W
	Working temperature	-10 °C ~ 55 °C
	Working humidity	10% ~ 90%
	Chassis	19-inch rack-mounted 1.5U chassis
	Dimensions (W x D x H)	445 x 390 x 70mm (17.5" x 15.3" x 2.8")
	Weight	≤ 4 Kg (8.82lb) (without hard disk)