


RG591CS/RG593CS

RG59 Coaxial Cable, 20% CCS, 100m

RG59 Coaxial Cable, 20% CCS, 300m

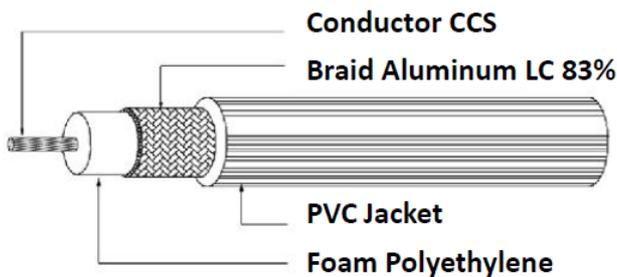

Application

- High quality RG Type Coaxial Cable, 75Ω suitable for many applications, particularly broadcast and CATV installations.

Product Facts

- Indoor Use, accepts 100m longer
- Suitable for shop-lot, home

| ITEM | | UNIT | SPEC. VALUE |
|---|-----------------|----------|-------------------|
| Inner Conductor | Material | --- | Copper Clad Steel |
| | Dia.(approx) | mm | 0.81 ± 0.15 |
| | Insulation | Material | --- |
| | Nom. Thickness | mm | 1.56 ± 0.18 |
| | Dia.(approx) | mm | 3.70 ± 0.18 |
| | Colour | --- | Natural |
| | Outer Conductor | Type | --- |
| | Material | --- | Aluminum LC |
| | Coverage | % | 83 ± 3 |
| | Dia.(approx) | mm | 0.12 x 80 |
| | Jacket | Material | --- |
| | Nom. Thickness | mm | 0.80 ± 0.2 |
| | Colour | --- | Black |
| | Dia.(approx) | mm | 5.90 ± 0.20 |
| | CHARACTERISTICS | | |
| DC Conductor Resistance at 20°C | | | < 26.1Ω/100m |
| Insulation Resistance at 20°C | | | > 200 MΩ.m |
| Nominal Velocity of Propagation | | | 66.6 ± 3% |
| Capacitance | | | 67 ± 5 pF/m |
| Characteristic Impedance at 20°C,200MHz | | | 75 ± 5Ω |
| PACKING | | | WEIGHT |
| Wooden drum - 300x300x200(mm) | 300m/drum | | 9.8.kg |

Note : All specifications may change without prior notice