


RG5925DC

RG59 Coaxial Cable + DC Cable, 250m

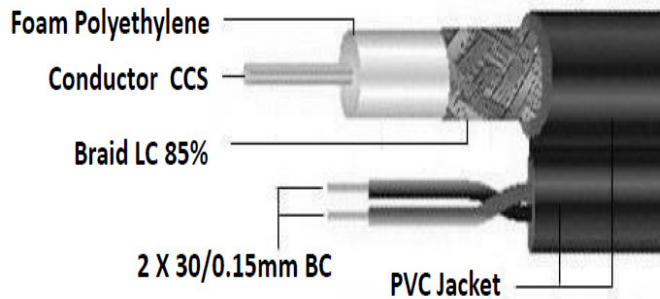

Application

- High quality RG Type Coaxial Cable, 75Ω combining with 2 core VDE power cable suitable for many applications, particularly broadcast and CCTV installations.

Product Facts

- Indoor Use, accepts 100m longer for Coaxial Cable
- Suitable for shop-lot, home
- 2 Core power 30 X 0.15mm

ITEM		UNIT	SPEC. VALUE
Inner Conductor	Material	---	Copper clad steel
	Dia.(approx)	mm	0.81 ± 0.15
Insulation	Material	---	Foam Polyethylene
	Nom. Thickness	mm	1.56 ± 0.18
	Dia.(approx)	mm	3.70 ± 0.18
	Colour	---	Natural
Outer Conductor	Type	---	Braid
	Material	---	LC Aluminum
	Coverage	%	85 ± 3
	Dia.(approx)	mm	0.12×96
Jacket	Material	---	PVC
	Nom. Thickness	mm	0.80 ± 0.2
	Colour	---	Black
	Dia.(approx)	mm	5.90 ± 0.20
CHARACTERISTICS			
DC Conductor Resistance at 20°C			$< 26.1\Omega/100m$
Insulation Resistance at 20°C			$> 200 M\Omega.m$
Nominal Velocity of Propagation			$66.6 \pm 3\%$
Capacitance			$67 \pm 5 pF/m$
Characteristic Impedance at 20°C,200MHz			$75 \pm 5\Omega$
PACKING			WEIGHT
Wooden drum - 300x300x200(mm)		250m/drum	11.8.kg

Note : All specifications may change without prior notice