


# TF2315

## Bare Copper Twin Flat DC Cable, 80m

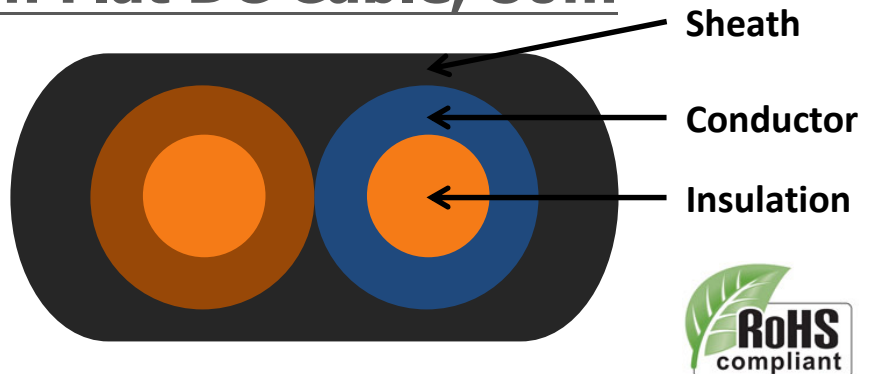

Dimension of Conductor	
Nominal Cross Sectional Area	0.40mm <sup>2</sup>
Number of Wire	23
Diameter of Single Wire	0.15mm ± 0.01mm
Dimension of Insulation	
Thickness	0.60mm ± 0.10mm
Diameter	2.00mm ± 0.20mm
Dimension of Sheath	
Thickness	0.65mm ± 0.10mm
Overall diameter	3.30mm x 5.4mm ± 0.20mm
Construction	
Number of Core	2 cores
Conductor	Flexible Plain Annealed Copper
Insulation	PVC Compound TI1 according to BS 6746
Colour of Insulation	Blue & Brown
Sheathing	PVC Compound T6 according TO BS 6746
Colour of Sheath	Black unless otherwise specified
Technical Data	
Max. Conductor Resistance 20°C	55.3Ω/km
Max. Conductor Temperature in Normal Use	70°C
Testing Voltage	1500V/5min
Spark Test	6kV a.c. (r.m.s.)
Absence of Harmful Substances	According to RoHS regulation 2002/95/EC

Note : All specifications may change without prior notice