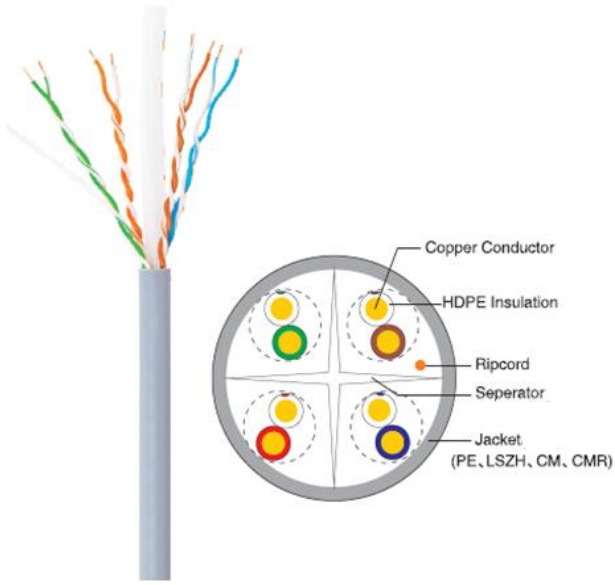


UTP Category 6 Cables

Content of Data Sheet			
Product model	CAB-LC3100A-E-IN / CAB-LC3100B-E-IN		
Product specification	HSYV-6 4×2×0.52		
Test Standard	ISO/IEC11801、TIA-568-C.2、YD/T1019		
Conductor	Material	Solid-Bare Copper	
	AWG	24	
	Nom.O.D.(mm)	0.52±0.03 mm	
	DC resistance	≤95 Ω/km	
Insulation	Material	HDPE	
	Thickness	0.2±0.02 mm	
	Diameter	0.93±0.05 mm	
	Color	Blue/White- Blue	
		Orange/White-Orange	Brown/White-Brown
	Pitch	Offset pitch	≤20 mm
Cable pitch		≤120 mm	
Sheath	Material	PVC(complies RoHS/REACH)	
	External O.D.	5.8±0.3 mm	
	Color	Orange	
	Tensile strength	>13.5 Mpa	
	Thickness	0.6±0.05 mm	
Surface Printing	Letter height	3.0±0.3 mm	
	Color	Black	
	Print error & Space	1±0.005 m	
	Case number	Yes	
Packing	Packing	Carton	

	Once packing dimension	420mm*205mm*420mm		
	Twice packing dimension	450mm*440mm*445mm		
	Twice packing quantity	2 cases		
Packing length	305±1m			
Rip-cord	Yes		Crossing backbone	Yes
Ambient temperature	-20℃ ~ 60℃			

Zhejiang Uniview Technologies Co.,Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2011-2018 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.