


ND830

3.0MP IR POE Dome Camera

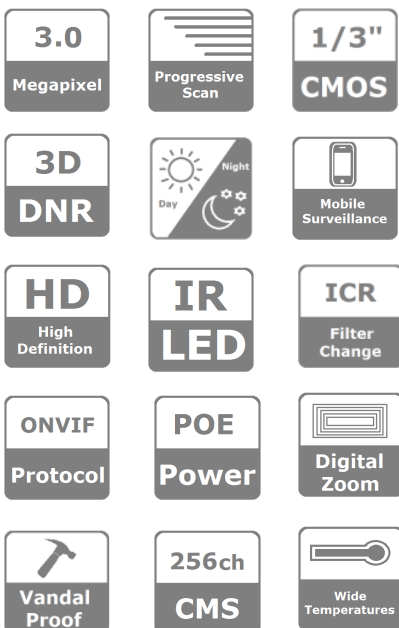

Key Features

- 3.0 Megapixel
- H.264 High Profile
- ONVIF compatible
- 2.8/4mm Fixed Lens
- 3D-DNR
- Day & Night by Filter Change
- Android, iPhone/iPad application
- 64ch CMS Software included
- Indoor Application
- 30pcs IR LED
- POE / 12 VDC

Video & Operation

Image Sensor	1/3" progressive scan CMOS Sensor
Effective Pixel	2048 x 1536 @ 12.5fps 1920 x 1080 @ 25fps
Resolution	3.0 Megapixel
Min. Illumination	0Lux (IR ON) up to 15m
Compression	Dual Stream : H.264 High Profile / MJPEG
Protocol	ONVIF Compatible
Electronic Shutter Speed	1/25s ~ 1/100,000s
Sync. System	Internal Synchronization
Day/Night	AUTO/SMART/COLOR/ B/W
Bit Rate	32 kbps ~ 16Mbps
Network	10/100 Base-T, RJ45

Lens

Lens Type	2.8/4mm
Lens Mount	M12
IR LED	30pcs & 15M

Electrical

Power Voltage	POE IEEE 802.3af compliant, or 12VDC, Max. 5.5W (IR-On)
---------------	---

Environmental

Working Temperature	-10 °C ~ +60 °C
Working Humidity	≤ 90%RH

Physical

Case Material	Metal
Net weight	600G