


## RG593BC

### RG59 Coaxial Cable, Bare Copper, 300m

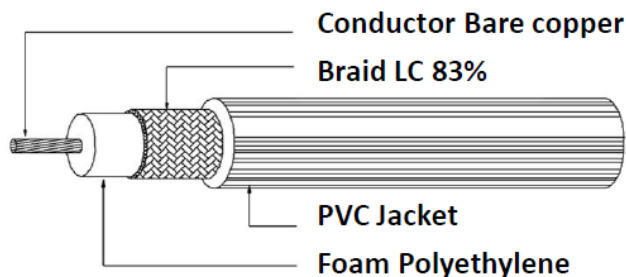

#### Application

- High quality RG Type Coaxial Cable, 75Ω suitable for many applications, particularly broadcast and CATV installations.

#### Product Facts

- Indoor Use, accepts 250m longer
- Suitable for shop-lot, home

ITEM		UNIT	SPEC. VALUE
Inner Conductor	Material	---	Bare Copper
	Dia.(approx)	mm	0.65 ± 0.15
Insulation	Material	---	Foam Polyethylene
	Nom. Thickness	mm	1.56 ± 0.18
	Dia.(approx)	mm	3.70 ± 0.18
	Colour	---	Natural
Outer Conductor	Type		Braid
	Material	---	Aluminum LC
	Coverage	%	83 ± 3
	Dia.(approx)	mm	0.12 x 80
Jacket	Material	---	PVC
	Nom. Thickness	mm	0.80 ± 0.2
	Colour	---	Black
	Dia.(approx)	mm	5.90 ± 0.20
CHARACTERISTICS			
DC Conductor Resistance at 20°C			< 26.1Ω/100m
Insulation Resistance at 20°C			> 200 MΩ.m
Nominal Velocity of Propagation			66.6 ± 3%
Capacitance			67 ± 5 pF/m
Characteristic Impedance at 20°C,200MHz			75 ± 5Ω
PACKING			WEIGHT
Wooden drum - 300x300x200(mm)	300m/drum		10.2.kg

Note : All specifications may change without prior notice